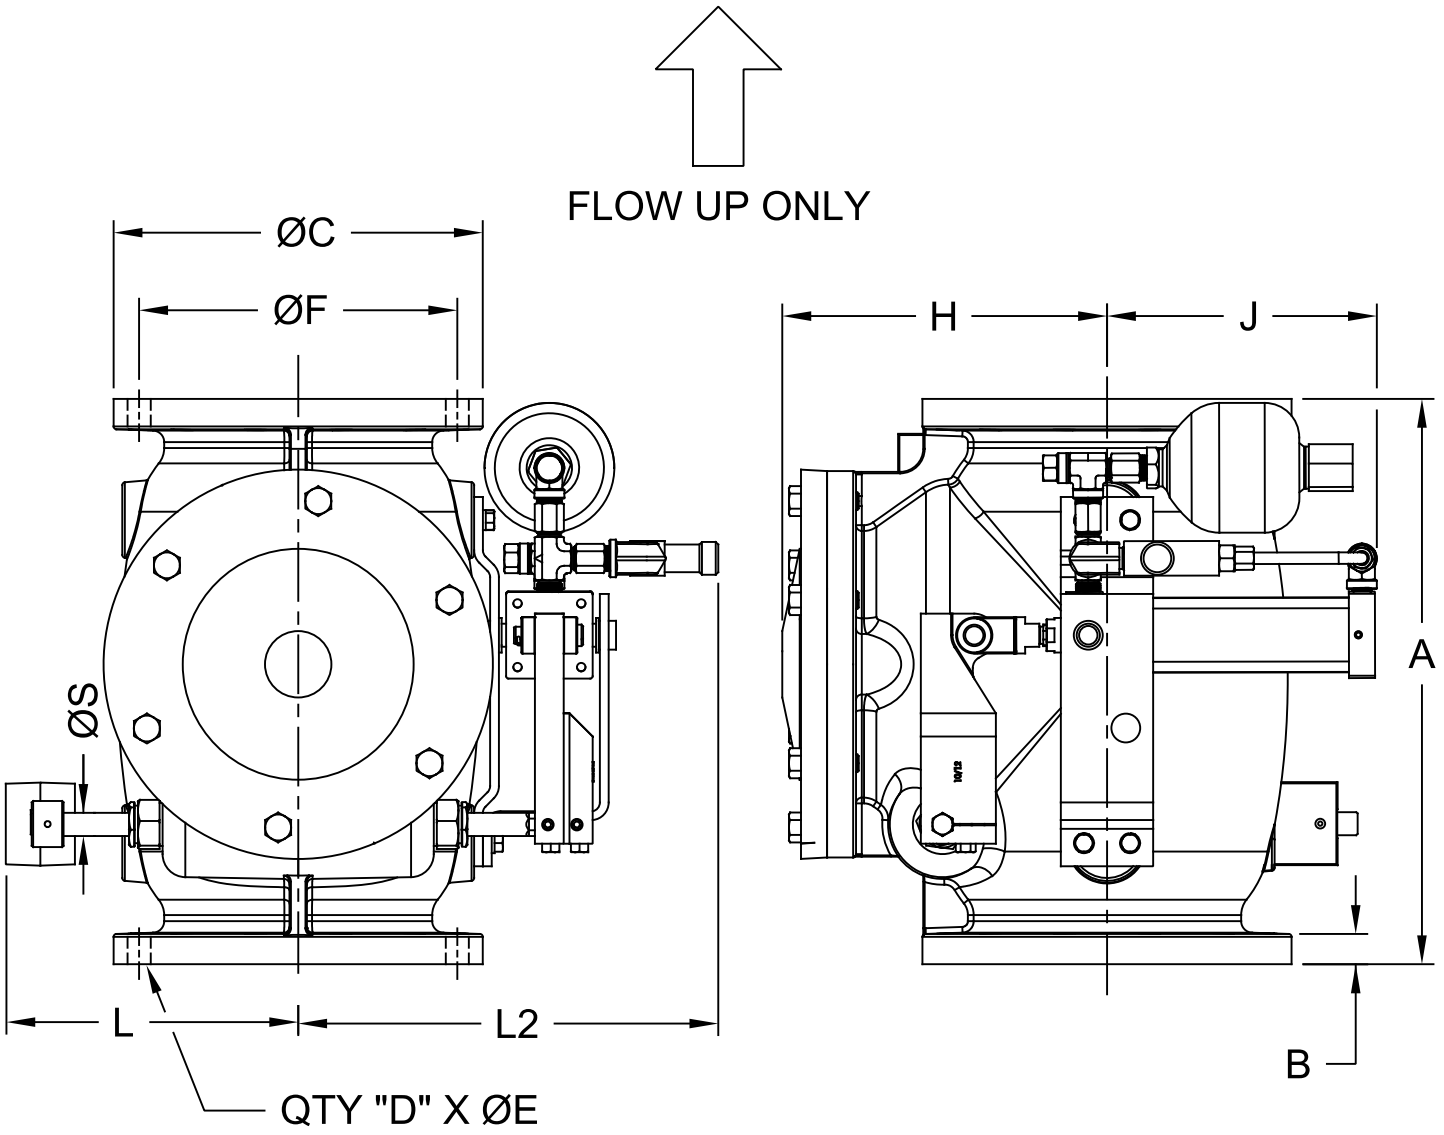


DIMENSIONS (Inches)												
SIZE	**A**	**B**	**C**	**D**	**E**	**F**	**H**	**J**	**L**	**L2**	**S**	**WT (lbs)**
3	9.50	0.78	7.50	4	0.75	6.00	6.85	8.31	8.13	10.40	0.50	92
4	11.50	1.00	9.00	8	0.75	7.50	8.69	9.31	9.56	13.62	0.63	157
6	14.00	1.06	11.00	8	0.88	9.50	10.51	7.12	10.38	14.80	0.75	226
8	19.50	1.25	13.50	8	0.88	11.75	12.56	6.75	11.75	15.74	0.88	412
10	24.50	1.31	16.00	12	1.00	14.25	14.07	11.60	13.68	18.21	1.00	625
12	27.50	1.38	19.00	12	1.00	17.00	16.13	10.57	14.94	19.47	1.00	876

NOTE:
1. FLANGES CONFORM TO ANSI B16.1 CLASS 125
2. COLD WORKING PRESSURE - 200 PSI
3. HYDROSTATIC TEST PRESSURE - 400 PSI

DESCRIPTION:	DATE:	DRAWING:
3"-12" AWWA C508 - 125# Flanged Swing Check Valve - Oil Cushion (AIS/BABA) Vertical Installation	10/23/2026	SW-DD0027-A

MCWANE PLANT & INDUSTRIAL
McWane Plant & Industrial
1201 Vanderbilt Road
Birmingham, AL 35234

CLOW VALVE CO. | KENNEDY VALVE | M&H VALVE COMPANY

Products and images depicted are for general illustrative purposes only and do not represent the complete scope of supply, configuration, or country of origin. Final product details are governed solely by McWane Plant & Industrial's standard Terms and Conditions of Sale.